



F2 NETWORK CABINETS

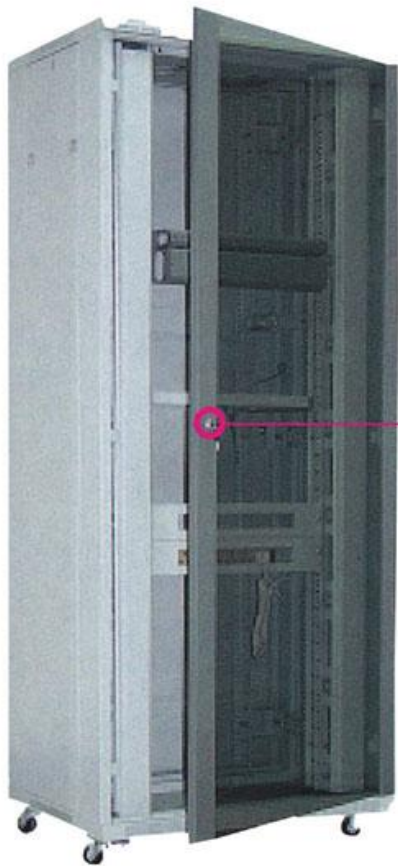


Moon-shaped lock is option



Fan tray



Adjustable mounting angle and rail

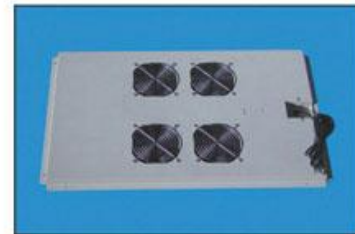

FAN-68 for F2-6842U (4 fans, 600x800 mm)



FAN-66 for F2-6642U (2 fans, 600x600 mm)

AIR FAN

STANDARD:

Comply with ANSI/EIA RS-310-D, IEC297-2, DIN41491; part 1, DIN41494; part 7, GB/T3047.2-92 & ETSI standard

FEATURE:

- Exquisite design with precise dimension and craftsmanship
- Tempered glass front door with door border and steel rear door
- Feet and castors are available at the same time
- Several lockable cable entrances on top/bottom plate with adjustable sizes
- Optional plinth enables cabinet to stay in a fixed position, meeting requirements of under-base cable entry/ventilation and prevention
- Efficient cabinets connectors (patent)
- Removable side doors, easy to install and maintain
- Around 1/2~2/3 of original assembled volume when disassembled

CAGE NUTS

FCN-03



FCN-03
50 pcs/polybag

MATERIAL:

- SPCC Cold Rolled Steel:
- Thickness: Mounting rail: 2.0 mm
Mounting angle: 1.5 mm,
others: 1.2 mm

SURFACE FINISH:


Degreasing, pickling,
phosphoric, powder coat

LOADING CAPACITY:

Static loading: 500kg

F2 NETWORK CABINETS

WIDTH 800mm F2 NETWORK CABINETS

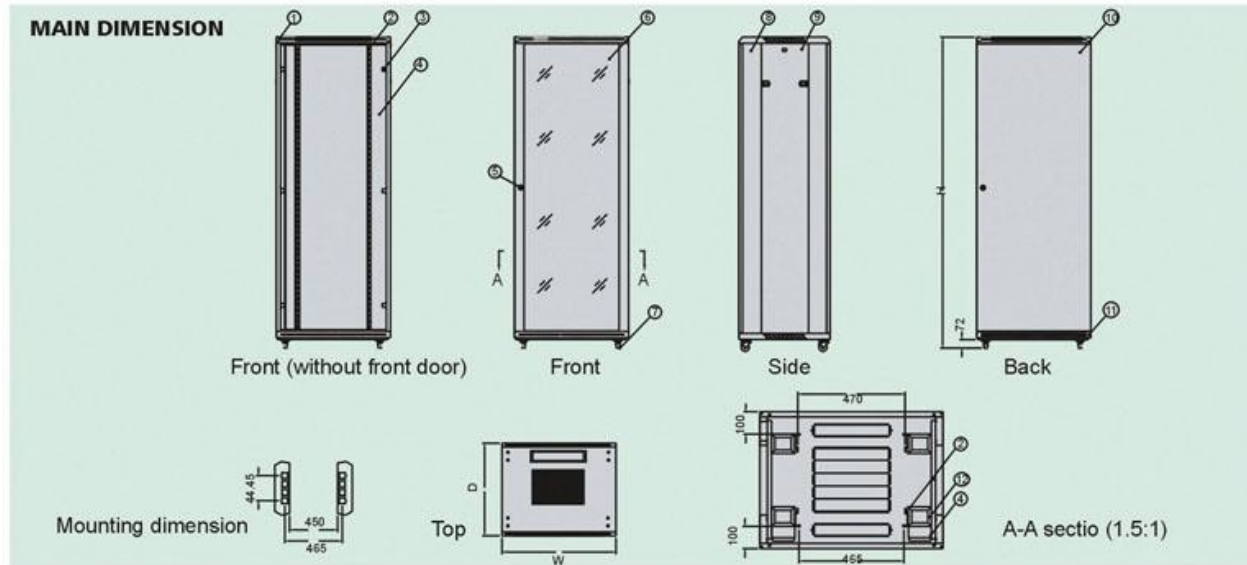

Specification	Qty	Unit	Material	Surface finish	Remark
1. Top cover	1	piece	SPCC Cold rolled steel t1.2	Degreasing, Phosphoric, Powder coat	---
2. Mounting rail	4	piece	SPCC Cold rolled steel t2.0	Degreasing, Phosphoric, Powder coat	---
3. Mounting angle	6	piece	SPCC Cold rolled steel t1.5	Degreasing, Phosphoric, Powder coat	Lower 32U 4pcs
4. Cable management slot	2	piece	SPCC Cold rolled steel t0.8	Degreasing, Phosphoric, Powder coat	---
5. Lock	2	piece	---	Nickel coat	Lower 2pcs locks
6. Tempered glass front door	1	piece	toughed glass door/SPCCt1.2	Powder coat	---
7. 2" castor	4	set	---	---	---
8. Frame	2	piece	SPCC Cold rolled steel t1.2	Powder coat	---
9. Side door	2	piece	SPCC Cold rolled steel t1.2	Degreasing, Phosphoric, Powder coat	---
10. Plate rear door	1	piece	SPCC Cold rolled steel t1.2	Degreasing, Phosphoric, Powder coat	---
11. Bottom	1	piece	SPCC Cold rolled steel t1.2	Degreasing, Phosphoric, Powder coat	---
12. Connecting plate for cable	12	piece	SPCC Cold rolled steel t2.0	Degreasing, Phosphoric, Powder coat	Lower 32U 8pcs
13. M6 B-head screw	20	piece	Steel	Color zinc	Above 32U 40pcs
14. M6 square nut	20	piece	Steel	Color Zinc	Above 32U 40pcs
15. Inner six-angle wrench	1	piece	Steel	Black	---
16. M12 support	4	piece	---	---	---

How to Order:

Item No:	Capacity(U)	Width(mm)	Depth(mm)	Packing Dimension	Volume(CBM)
F2-6618	18	600	600	670x670x1028	0.4615
F2-6818	18	600	800	670x870x1028	0.5992
F2-6622	22	600	600	670x670x1196	0.5369
F2-6822	22	600	800	670x870x1196	0.6971
F2-6627	27	600	600	670x670x1418	0.6460
F2-6827	27	600	800	670x870x1418	0.8266
F2-6632	32	600	600	670x670x1640	0.7362
F2-6832	32	600	800	670x870x1640	0.9560
F2-6637	37	600	600	670x670x1863	0.8363
F2-6837	37	600	800	670x870x1863	1.0859
F2-6642	42	600	600	670x670x2085	0.9360
F2-6842	42	600	800	670x870x2085	1.2153
F2-8642	42	800	600	870x670x2085	1.2513
F2-8842	42	800	800	870x870x2085	1.5781
F2-6942	42	600	960	670x1060x2085	1.3
F2-8942	42	800	960	870x1060x2085	1.55
F2-6647	47	600	600	670x670x2307	1.0356
F2-6847	47	600	800	670x870x2307	1.3448
F2-8647	47	800	600	870x670x2307	1.34481
F2-8847	47	800	800	870x870x2307	1.74621
F2-8947	47	800	960	870x1060x2307	1.65